

ESC8000-E12

New Generation, High Performance 4U NVIDIA MGX™ Server



4U



2



32

ESC8000-E12 is a dual-socket server powered by Intel® Xeon® 6 processors, designed for enterprise AI infrastructure with exceptional computational capabilities, accelerating GPU interconnects and high-bandwidth fabric, supporting up to eight 600W dual-slot GPUs, and offering scalable performance through configurable NVIDIA® NVLink™ 2-Way or 4-Way Bridges to optimize bandwidth and performance for demanding AI and HPC workloads.

FEATURE

- Intel® Xeon® 6 Processors
- High-density 4U server
- Optimized Performance
- Flexible storage options
- Toolless Design

Intel® Xeon® 6 Processors

Powered by Intel® Xeon® 6 Processors featuring 86 cores, eight-channel DDR5 memory up to 6400MHz and a maximum TDP of 350 watts per socket.

High-density 4U server

Designed to support up to eight high-end GPUs in dual-slot configurations, each up to 600 watts. Also supports NVIDIA® NVLink™ 2-Way or 4-Way bridges, ideal for demanding workloads.

Optimized Performance

GPU, NIC/DPU, and dual M.2 boot drives are directly connected to the CPU, minimizing latency and enhancing speed without occupying storage.

Flexible storage options


Supports up to six 2.5-inch U.2 NVMe drives with customizable hardware RAID configurations, delivering scalable and high-performance storage solutions.

Toolless Design

The ASUS-exclusive toolless design empowers easy service and saves over 90% maintenance time for maximum efficiency.

Target market

- Virtual Machines
- Data Center
- HPC Application
- AI Training
- LLM Inference

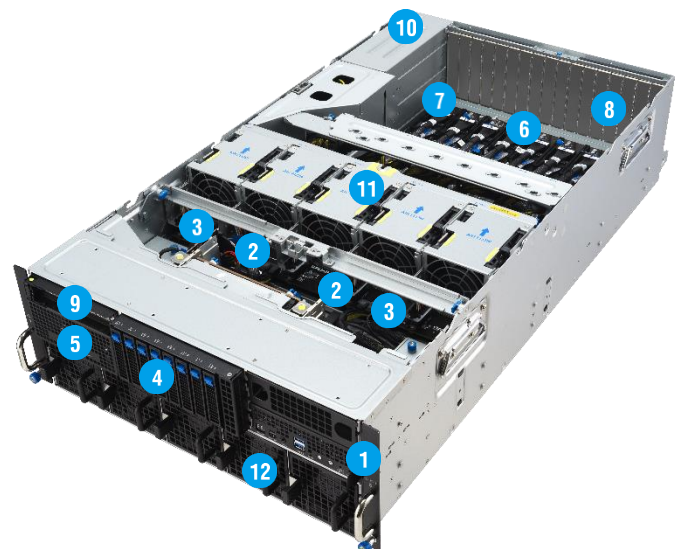

1. Asset Tag
2. 32 x DDR5 DIMM up to 6400Mhz
3. 2 x Intel® Xeon® 6 Processors
4. 8 x 2.5" Hot-swap HDD Bays
5. 2 x M.2 (Gen 5 x4 link, up to 22110)
6. 8 x PCIe slot for dual-slot GPU (Gen5 x16 link, support up 600W)
7. 1 x PCIe slot for NIC/ NVIDIA BlueField®-3 DPUs (Gen5, x16 link, FHHL)
8. 1 x PCIe slot for NIC (Gen5, x16 link, FHHL)
9. 1 x PCIe slot for PCIe card (Gen5 x8 link, FHHL)
10. 3+1 Redundant 3200W 80 PLUS Titanium Power Supply
11. 5 x GPU Fan
12. 5 x System Fan

ESC8000-E12

SPECIFICATION

| | | |
|--|--------------------------------------|---|
| Processor Support | | 2 x LGA 4710 sockets Intel® Xeon® 6 processors *Up to 350 TDP |
| Core Logic | | System on Chip (SOC) |
| Memory | Total Slots | 32 x DIMM slots (8 channel per CPU, 16 DIMM per CPU) |
| | Capacity | Maximum up to 4TB |
| | Memory Type | DDR5 6400 (1DPC) / 5200 (2DPC) RDIMM *Refer to ASUS server AVL for the latest update |
| | Memory Size | 128GB, 96GB, 64GB, 32GB RDIMM *Refer to ASUS server AVL for the latest update |
| Expansion Slots | Total Slots | 11 |
| | Slot Type | Rear: - 8 x PCIe x16 (Gen5 x16 link, FHFL) for dual-slot GPU cards - 1 x PCIe x16 (Gen5 x16 link, FHHL) for NIC card or NVIDIA BlueField®-3 DPU - 1 x PCIe x16 (Gen5, x8 link, FHHL) for NIC card Front: - 1 x PCIe x16 (Gen5 x8 link, FHHL) for HBA/RAID card |
| Storage Bays | | 8 x 2.5" Front Hot-swap Storage Bays (Backplane supports up to 8 x NVMe) |
| Networking | LAN | 1 x Management Port (RJ45) |
| Graphic | VGA | Aspeed AST2600 64MB |
| Front I/O Ports | | 1 x Mini DisplayPort 2 x USB 5Gbps ports 1 x Debug port |
| Rear I/O Ports | | 1 x USB 5Gbps port 1 x RJ-45 management LAN port |
| Switch/LED | | Front Switch/LED: 1 x Power switch/LED, 1 x Location switch/LED, 1 x Message LED, 1 x Clear CMOS switch, 1 x Reset switch, 2 x M.2 LEDs, 2 x LAN LEDs*, 1 x Q-Code/Port 80 LED Rear Switch/LED: 1 x Power switch/LED, 1 x Location switch/LED, 1 x Message LED *ESC8000-E12P only |
| OS Support | | Windows® Server, RedHat® Enterprise Linux, SuSE® Linux Enterprise Server, CentOS, Ubuntu, VMware Please find the latest OS support from OS Compatibility Guide ASUS |
| Management Solution | Software | ASUS Control Center (Classic) |
| | Out of Band Remote Management | On-Board ASMB12-iKVM for KVM-over-IP |
| Dimension | | 800mm x 439.5mm x 175 mm (4U) 31.5"x17.3"x 6.9" |
| Net Weight Kg (CPU, DRAM & HDD not included) | | 42 kg |
| Gross Weight Kg (CPU, DRAM & HDD not included, Packing include) | | 44.23 kg |
| Power Supply (following different configuration by region) | | 3+1 Redundant 3200W 80 PLUS Titanium power Rating: 220-240 Vac, 16A (x4) 50/60Hz |
| Environment | | Operating temperature: 10°C ~ 35°C* Non-operating temperature: -40°C ~ 60°C Non-operating humidity: 20% ~ 95% (Non-condensing) *For operating temperatures above 30°C, please contact your local sales representative |